


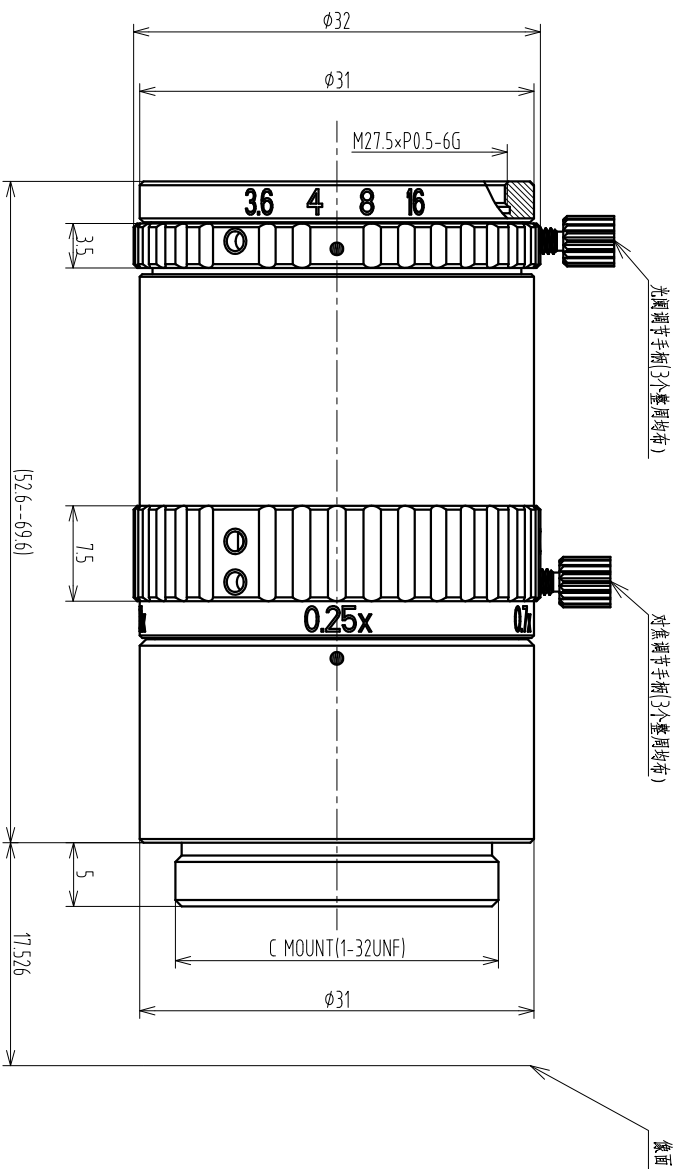

A									
1.1" F 1:2.8 /35 C Mount									
B									
C									
Focal Length				f=35mm					
Max Diameter (Ratio)				F=1:2.8~16(±10%)					
O/I				145.3~220.6					
Distortion (TV)				<0.05%					
D									
Storage Temperature Range				-20~+60°C					
E									
Working distance		Optical Magnification		FOV(mm)					
				1.1"(ø17.6)		1"(ø16)		2/3" (ø11.1)	
		H		V		H		V	
59		-0.7X		20.1 15		18.2 13.7		12.6 9.5	
63		-0.65X		21.6 16.2		19.6 14.7		13.6 10.2	
67		-0.6X		23.4 17.6		21.3 16		14.8 11.1	
73		-0.55X		25.6 19.2		23.2 17.4		16.1 12.1	
78		-0.5X		28.1 21.1		25.6 19.2		17.6 13.3	
87		-0.45X		31.2 23.4		28.4 21.3		19.7 14.8	
97		-0.4X		35.2 26.4		32 24		22.2 16.6	
110		-0.35X		40.2 30.1		36.5 27.4		25.3 19	
125		-0.3X		46.9 35.2		42.6 32		29.6 22.2	
150		-0.25X		56.3 42.2		55.6 41.7		38.6 28.9	

TOLERANCE: LINEARITY TOLERANCES -0.05 ANGULAR TOLERANCES ARE±30° DRAFT ANGLES ARE±0.5°/SIDE				三画法		材料(环集)		单位	比例
设计				丝波		ML3510规格书		mm	2:1
校对									页码
审核									1/1
批准						ML3510A-SPEC			版本
V0									