


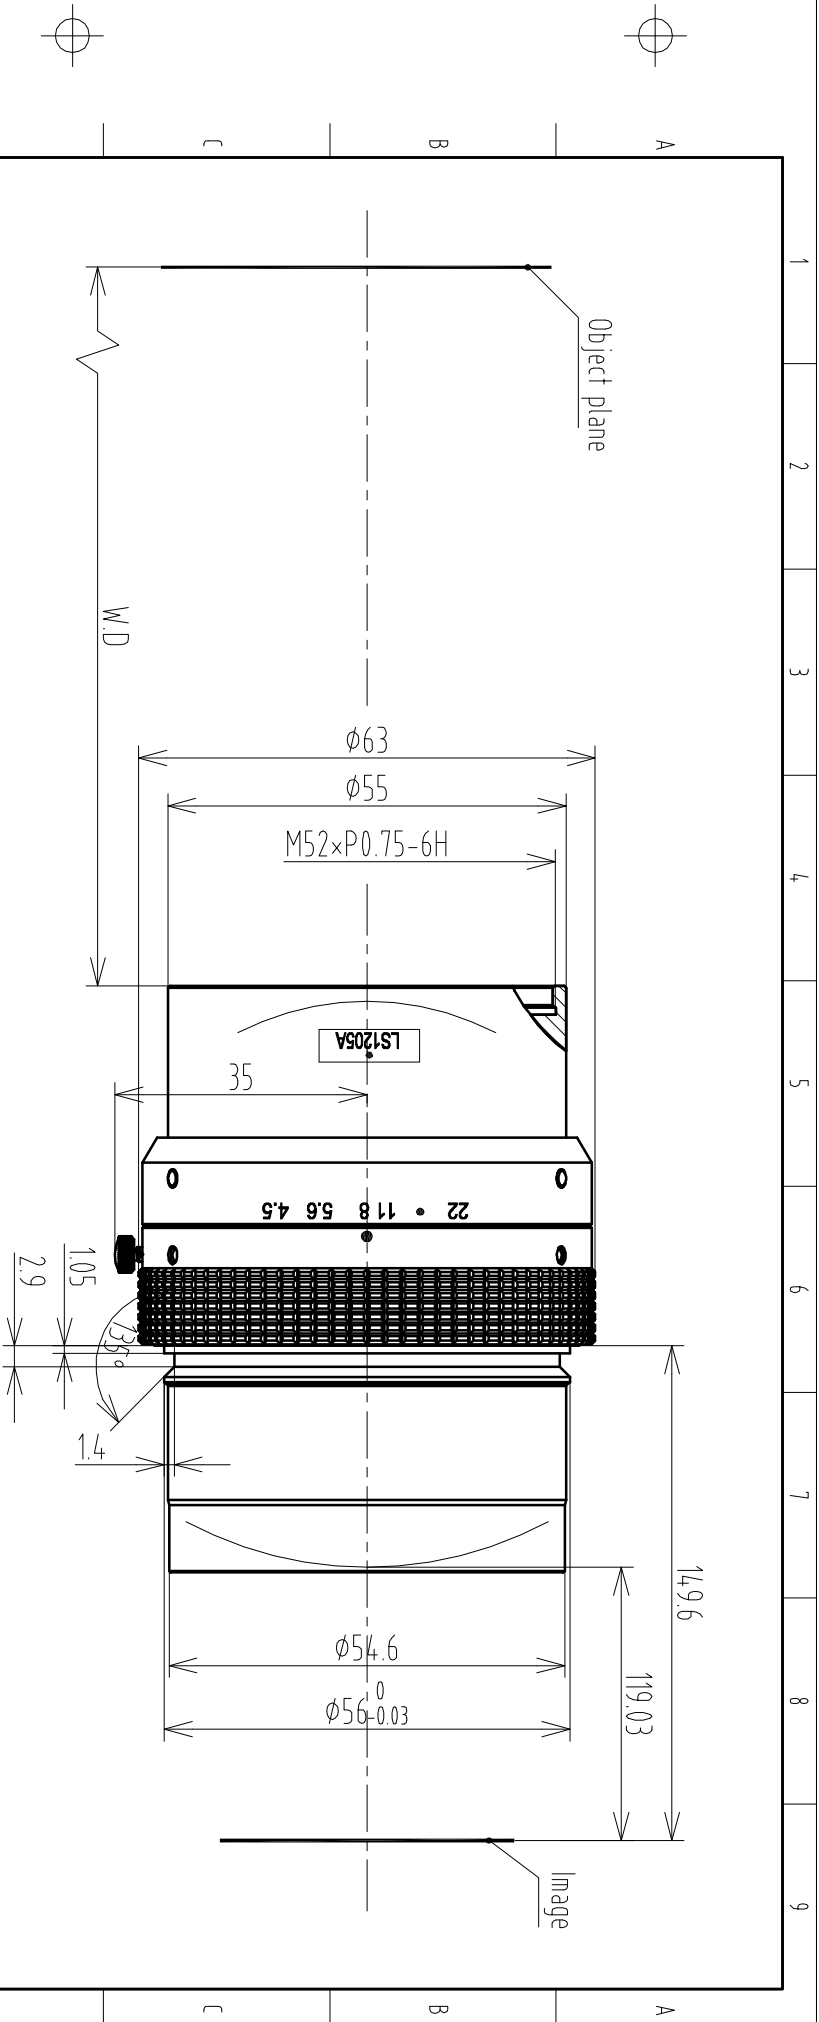

Main Specification			Image space NA		
Magnification	0.45X	0.5X	0.6X	Image space NA	0.073
Working Distance	318.2±5	291.7±5	251.9±5	Object space NA	0.036
Image Distance	113.17±2.5	119.03±2.5	131.05±2.5	Entrance pupil diameter	24.1
Conjugate Distance	511.61±9	491±9	463.19±9	Entrance pupil position	37.88
Flange Focal Distance	143.8	149.6	161.6	Exit pupil diameter	30.93
Max image		φ62		Exit pupil position	-212.57
F/#		4.5			
EFL		116			
FOV		29°			
EMP Diameter		24.1			
Distortion		<0.07%			
IMAGE QUALITY					
AXIS	φ46.2		φ66		

1	2	3	4	5	6	7	8	9
标记	处数	更改文件号	担当	变更日期	批准		代号	版本
							LS1205A-SPEC	V0

名称	LS1205A技术规格图	材料(环保)	单位	比例
设计	朱周德	2017-03-30	mm	1:1
校对				
审核				
批准				

注：
Logo上的圆点粘贴位置与成像面垂直为最佳成像点。