


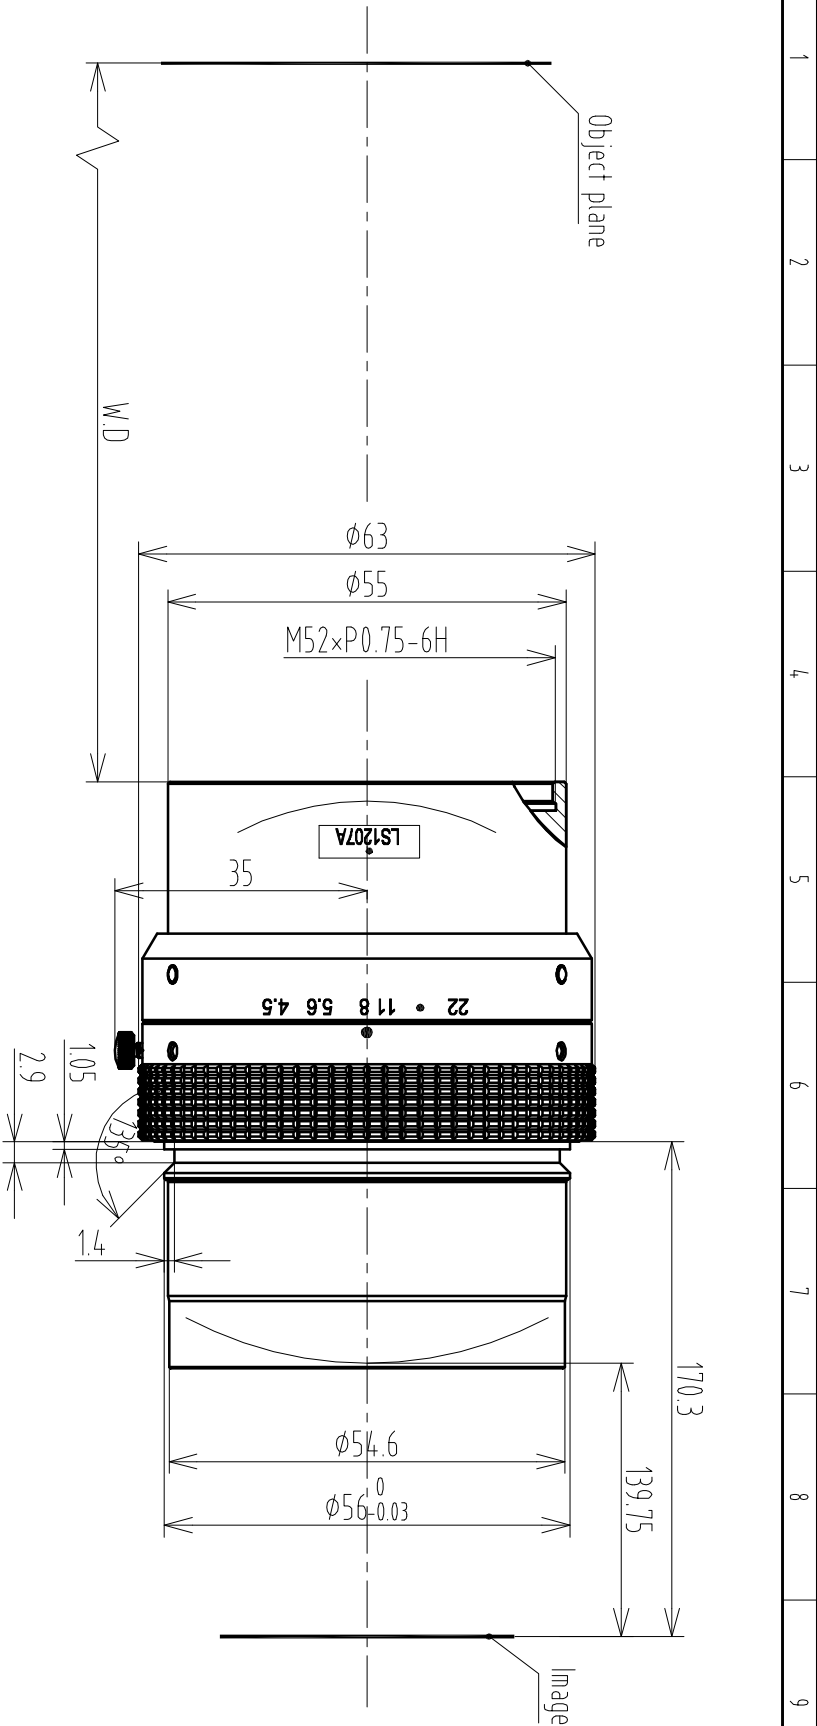

Main Specification

Magnification	0.7X	0.75X	0.85X
Working Distance	220.9±5	209.8±5	191.4±5
Image Distance	133.96±2.5	139.75±2.5	151.58±2.5
Conjugate Distance	435.1±9	429.85±9	423.2±9
Flange Focal Distance	164.5	170.3	182.2
Max image	$\phi 62$		
F/#	4.5		
EFL	116		
FOV	29°		
EMP Diameter	25		
Distortion	<0.005%		

Image space NA	0.066
Object space NA	0.05
Entrance pupil diameter	25
Entrance pupil position	39.27
Exit pupil diameter	30.93
Exit pupil position	-233.29

注：
Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

TOLERANCE:
LINEARITY TOLERANCES +0.05
ANGULAR TOLERANCES ARE±30°
DRAFT ANGLES AREA±0.9°/SIDE



材料(环保)

单位
mm

比例
1:1

名称
LS1207A技术规格图

页码
1/1

IMAGE QUALITY

AXIS $\phi 46.2$ $\phi 66$

标记

处数

更改文件号

担当

变更日期

批准

设计

朱周德

2017-03-30

校对

审核

批准

代号

LS1207A-SPEC

版本

V0