


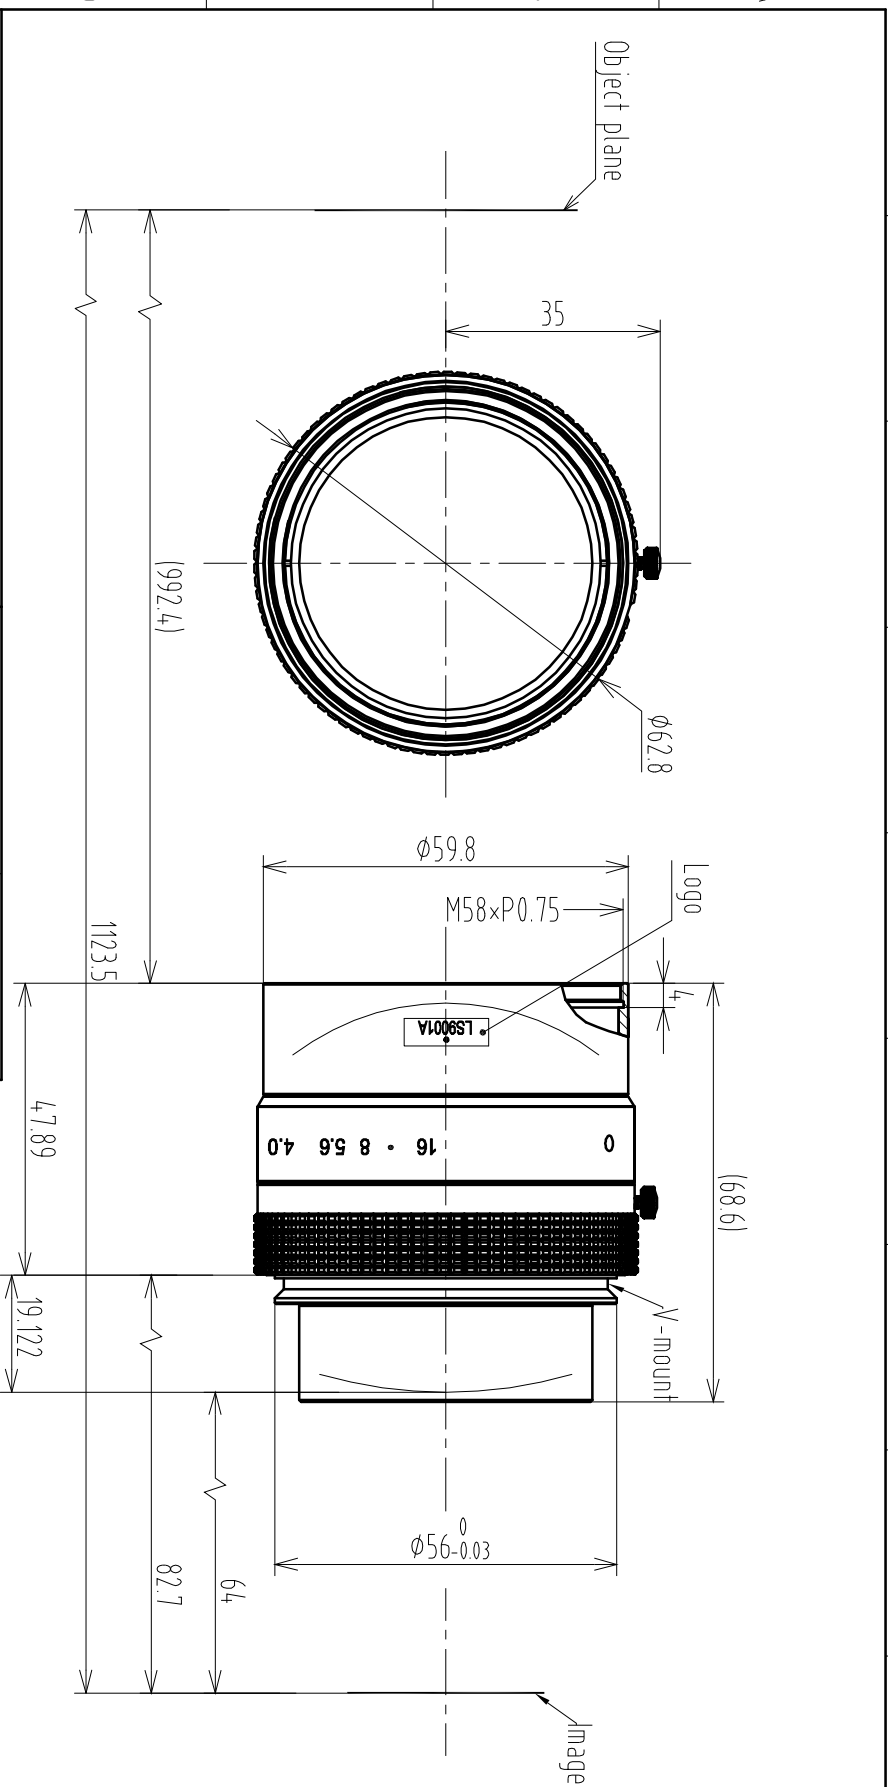

注：
Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

Main Specification				Image space NA	0.1		
Magnification	0.14X	0.1X	0.08X	Object space NA	0.01		
Working Distance	722±5	992.4±5	1229.2±5	Entrance pupil diameter	21.58		
Conjugate Distance	856.86±9	1123.5±9	1358.34±9	Entrance pupil position	42.87		
Flange Focal Distance	87±0.5	82.7±0.5	81.3±0.5	Exit pupil diameter	22.27		
Max image circle	φ64			Exit pupil position	-107.16		
F/#	4.0-16						
EFL	90						
Distortion	0.01%						
IMAGE QUALITY							
AXIS	φ46.2	φ66					
200lp/mm	125lp/mm	125lp/mm		标记	处数		
				更改文件号	担当		
				变更日期	批准		

TOLERANCE:
LINEARITY TOLERANCES ±0.05
ANGULAR TOLERANCES ARE ±30°
DRAFT ANGLES ARE A±0.5°/SIDE

三角法



材料(环保)

单位

mm

LS9001A技术规范图

LS9001A-SPEC

页码

1:1

版本

V0

注:

LOGO上的圆点粘贴位置与成像面垂直为最佳成像点。