


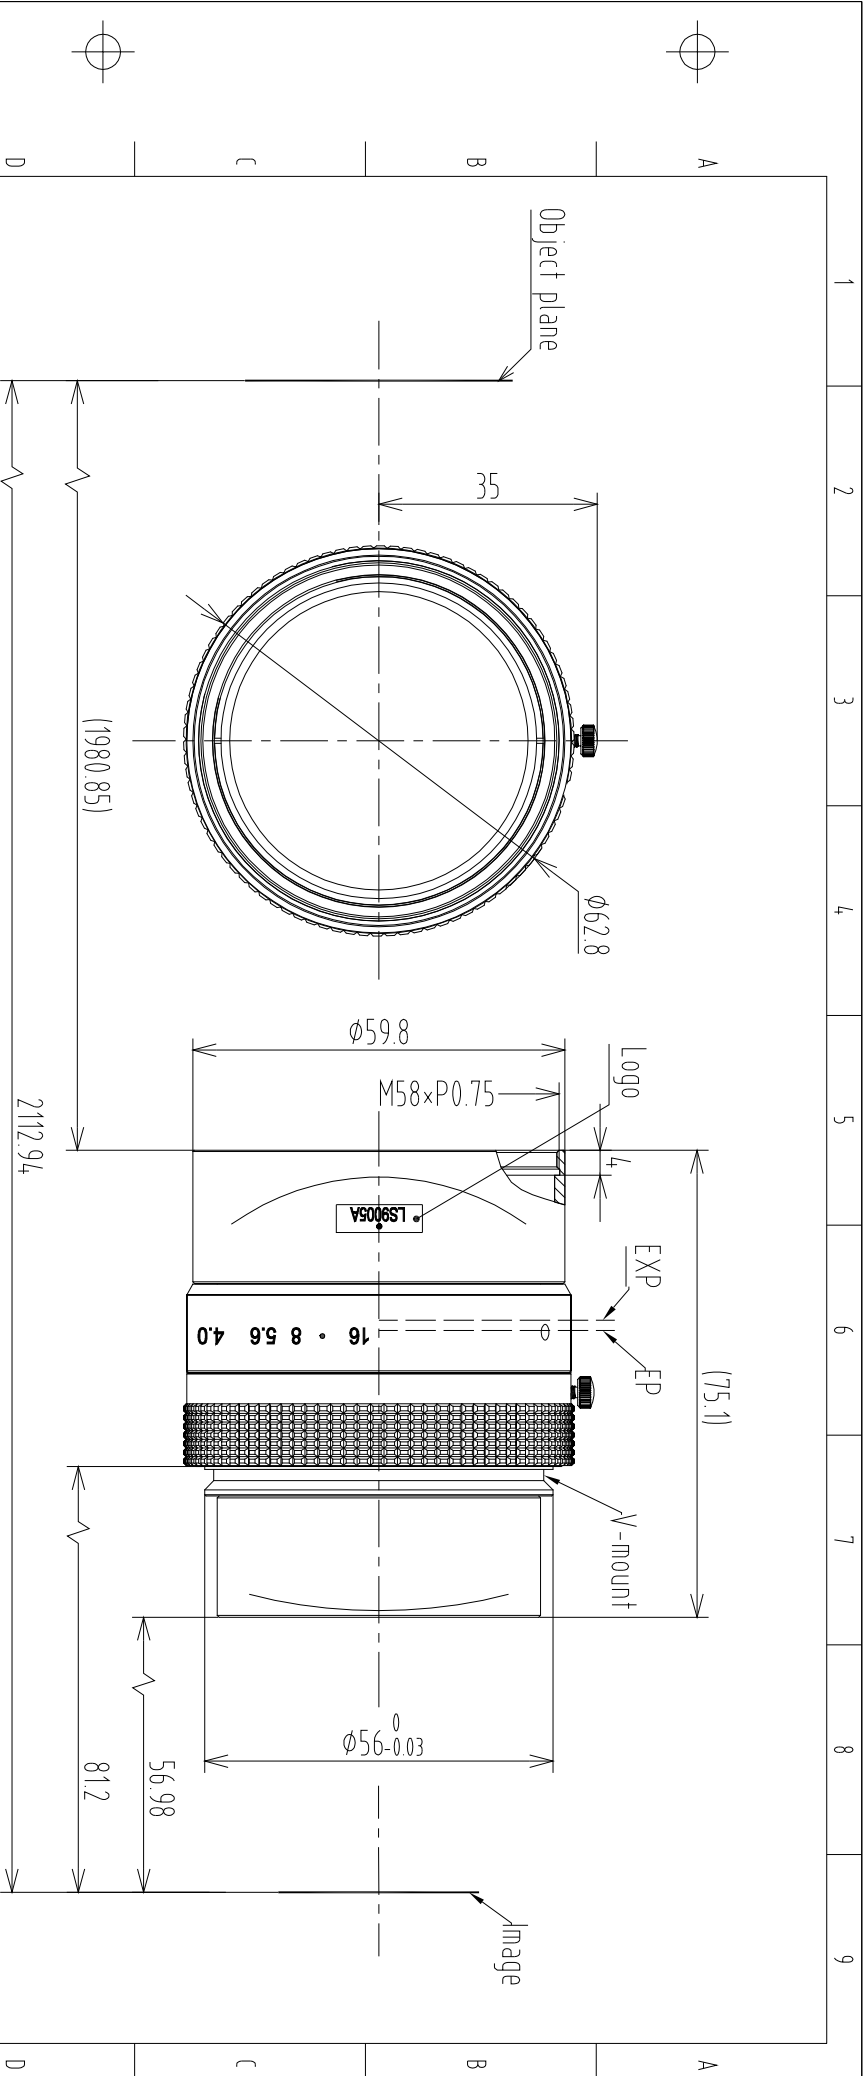

Main Specification				Image space NA	0.1
Magnification	0.03X	0.05X	0.08X	Object space NA	0.005
Working Distance	3274.18±5	1980.85±5	1253.35±5	Entrance pupil diameter	22
Conjugate Distance	3404.23±9	2112.94±9	1388.36±9	Entrance pupil position	4.7.5
Flange Focal Distance	79.26±0.5	81.2±0.5	84.11±0.5	Exit pupil diameter	23

Max image circle	$\phi 62$	Exit pupil position		-106	
F/#	4.0-16				
EFL	95				
Distortion	0.005%				

注：
Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

TOLERANCE:				三角法		材料(环 架)		单位	比例
LINEARITY TOLERANCES +0.05				ANGULAR TOLERANCES ARE $\pm 30^\circ$				mm	1:1
DRAFT ANGLES AREA $\pm 0.5^\circ$ /SIDE									
设计		朱周德	2015-04-21	名称		LS9005A技术规格图		页码	1/1
校对				代 号		LS9005A-SPEC		版本	V0
审核									
批准									

1	2	3	4	5	6	7	8	9
1	2	3	4	5	6	7	8	9