


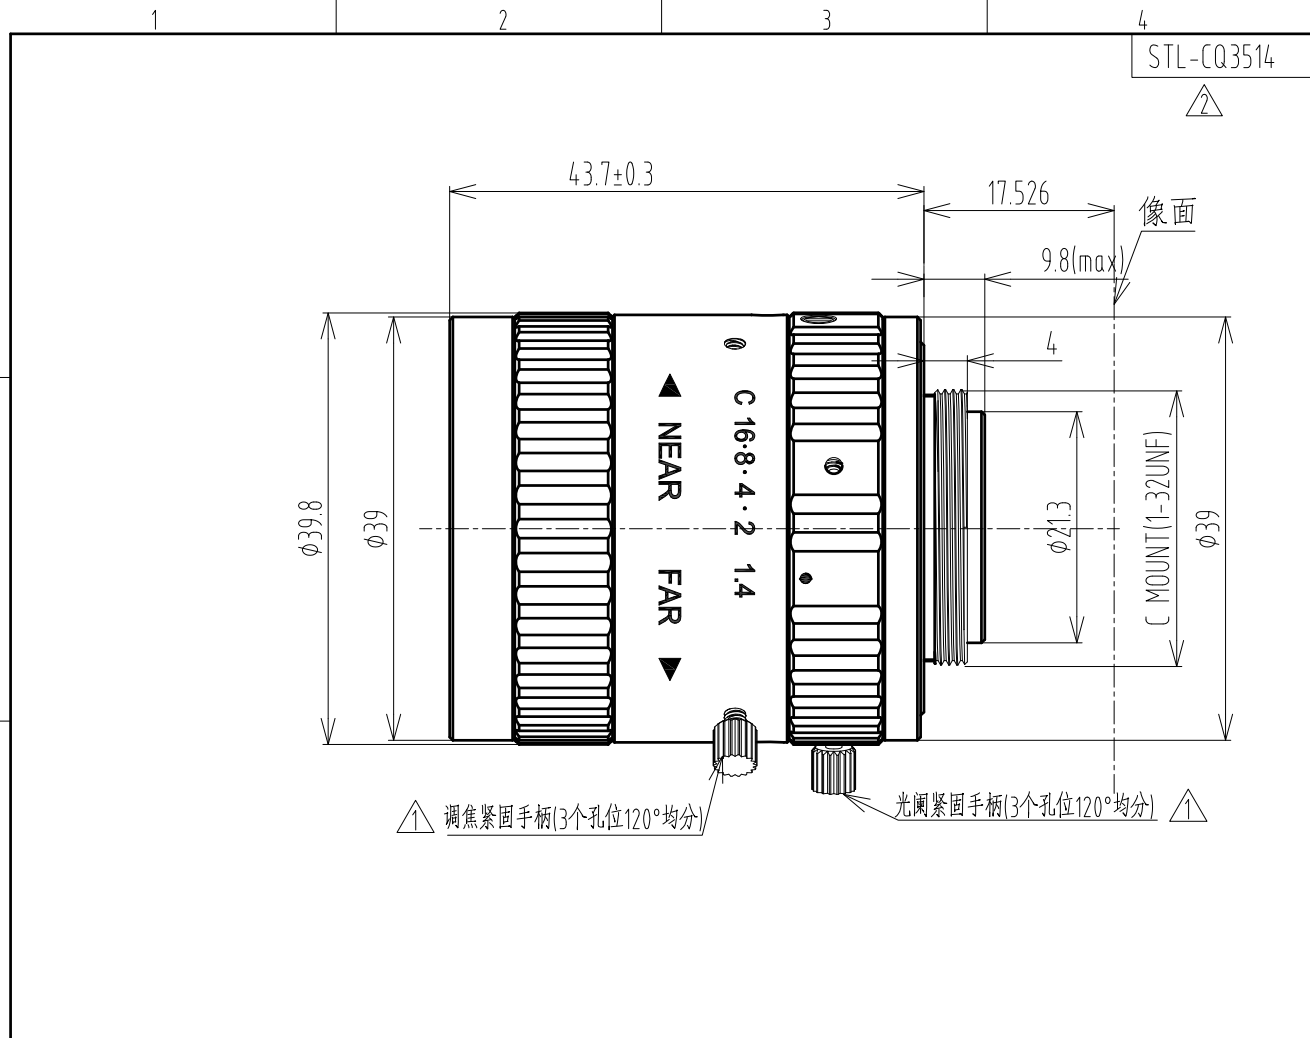

2/3" F1.4/35 C Mount					Working distance	Optical Magnification	2/3" Field of View(mm)		
Focal Length		f=35mm					H	V	
Max Diameter (Ratio)		F=1:1.4~16			mm				
Picture Size		2/3"	1/2"		900	0.037	236.2	176.9	
Angle	H	13.9°	10.1°		850	0.040	223.2	167.2	
	V	10.4°	7.6°		800	0.042	210.3	157.5	
	D	17.3°	12.6°		750	0.045	197.3	147.8	
Distortion (TV)		-0.8%	-0.4%		700	0.048	184.3	138.1	
Object Dimension at M.O.D(2/3")	H	81mm			650	0.052	171.4	128.4	
	V	60mm			600	0.056	158.4	118.6	
	D	100mm			550	0.061	145.5	108.9	
Focus distance(min)		0.2M			500	0.067	132.5	99.2	
Flange back		17.526mm in air			450	0.074	119.6	89.5	
Back focus		8.7MM			400	0.083	106.6	79.8	
Filter screw size		M37×0.5			350	0.094	93.7	70.1	
Front/Rear Effective Dia		φ24.8/φ13.6			300	0.110	80.7	60.4	
Mount		C-Mount			250	0.131	67.7	50.6	
Temperature Range		-10~+50℃			200	0.162	54.7	40.9	
Storage Temperature Range		-20~+60℃			150	0.213	41.8	31.2	
					TOLERANCE : · LINEARITY TOLERANCES ±0.05 · ANGULAR TOLERANCES ARE±30' · DRAFT ANGLES AREA±0.5°/SIDE		材 料 (环 保) ---	单 位	比 例
								mm	15:1
					设 计		名 称	FA3502D 镜头规格	
					校 对			页 码	
					审 核		代 号	1/1	
					批 准			版 本	
标记	处数	更改文件号	担当	变更日期	批 准			FA3502D-SPEC	
								V2	